
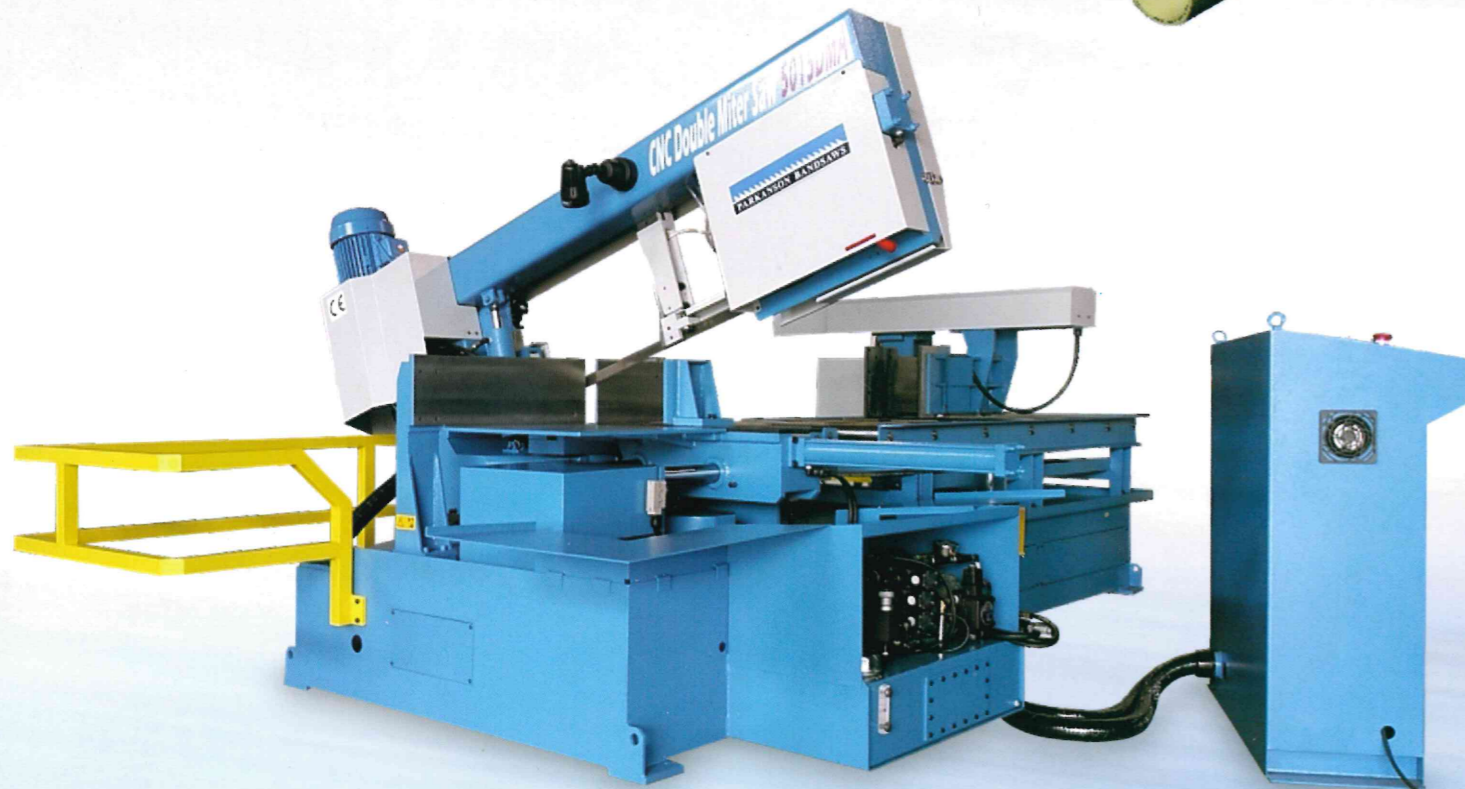


CNC Double Miter Cutting Bandsaws

CNC Fully automatic feeding and mitering bandsaws for cutting beams, pipes and solids.

Model: PK500DMA/ PK5015DMA/ PK5030DMA

1. 7" touch panel CNC control with inverter blade speed drive.
2. For frequent change of straight and miter cuts stepless from +30° to -45° in both directions.
3. Programming of cutting lengths, angles and number of pieces.
4. The CNC controller can be programmed offline on a desk top computer.
5. The material feeder with linear guide ways; precision rack and pinion, powered by servo motor.
(PK5015DMA/PK5030DMA)
6. Automatic movement of vices in conjunction with automatic miter. positioning accuracy of $\pm 0.1^\circ$.
7. Full automatic cutting cycle.
8. Mist coolant system.
9. PK500DMA with hydraulic feed vice. PK5015DMA/ PK5030DMA with servo feeder.

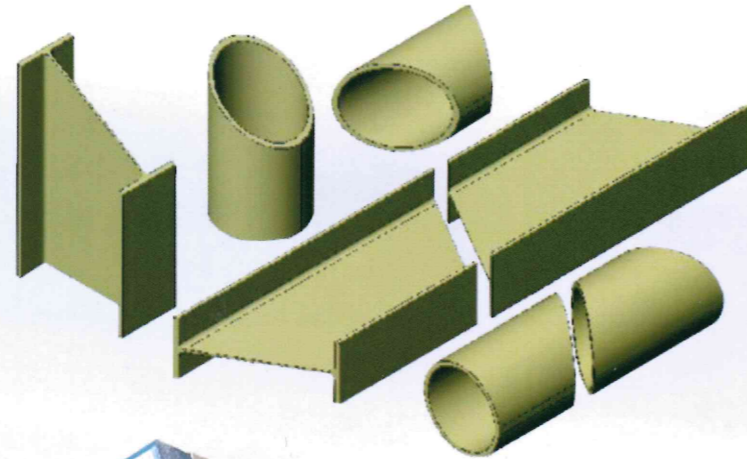

PK5015DMA/PK5030DMA



PK500DMA

Standard equipment

- Inverter blade speed drive
- Mist lubrication
- Laser line
- Working light

Optional equipment

- Hydraulic blade tension
- 2M Roller table
- 3M Roller table
- 3M Powered roller table
- Auto-chip conveyor

MODEL		PK500DMA	PK5015DMA / PK5030DMA
Cutting Capacity (mm)	● 90°		325
	■ 90°		320x500(HxW)
	■ 45° Left		320x350
	■ 30° Left		320x210
	■ 45° Right		320x350
Motors	Saw Blade		2.25KW
	Hydraulic		0.75KW
Blade Size		4755x34x1.1	
Blade Speed (M/min)		25-90	
Single Feed Stroke (mm)		600	1500 / 2500 (servo feed)
Working Height (mm)		650	
Dimensions (mm)	Length	2800	3500 / 4800
	Width	2280	2280
	Height	1650	1650
Net Weight (Approx.) Kg		2300	2900 / 3200